



Republic of the Philippines
 Department of Agriculture
NATIONAL DAIRY AUTHORITY
Southern Luzon Department
 144 JM Katigbak St., Brgy. San Carlos, Lipa City, Batangas
Tel. No.: (043) 724-5876
Email: ndasouthluzon@yahoo.com | **Website:** http://nda.da.gov.ph

Page	:	Page 1 of 3
Date Prep.	:	8/2/2021 1:55 PM
SL-BAC-0070-BULLETIN-202108		
Traceability Code		

BIDS AND AWARDS COMMITTEE
National Dairy Authority – South Luzon Department

REF: SUPPLY, DELIVERY, INSTALLATION AND COMMISSIONING OF MILK PROCESSING EQUIPMENT FOR SOUTH LUZON AREA (ORIENTAL MINDORO AND QUEZON PROVINCE) (PB#21-003)

Bulletin No. 1
2 August 2021

The opening of bids will be conducted to the new office address of NDA South Luzon Department at **E. Mayo Street, Brgy. 6, Lipa, City Batangas.**

The project title is: **SUPPLY, DELIVERY, INSTALLATION AND COMMISSIONING OF MILK PROCESSING EQUIPMENT FOR SOUTH LUZON AREA (ORIENTAL MINDORO AND QUEZON PROVINCE)** and the procuring entity is **NATIONAL DAIRY – SOUTH LUZON DEPARTMENT.**

Also, based on the results of the Pre-Bid Conference which was conducted on 19 July 2021 from 1:30 PM to 2:32 PM via videoconference (Webex Cisco), the following requirements were clarified accordingly:

- Bidding documents will be available at the new office NDA South Luzon Department. Interested bidders are advised to pay the tender documents personally or through an authorized representative (no official payment transaction portal at the moment).

Based on the discussions of the Section V. Technical Specifications, the following requirements were clarified accordingly and upon the recommendation of the TWG:

Particulars	Specifications	Clarifications/Corrections
BATCH PASTEURIZER	-200 liters capacity, 3 walled 304 stainless steel tank -with service inlet/outlet for hot water/cooling water -Electricals - 0.75kW, 220V, 60Hz, with 1P geared motor agitator, slow agitator -Temperature indicator 0-120 °C - with sanitary butterfly valve product outlet -Made: Stainless steel AISI 304 -Removable cover -Motor control on SS Panel 220V, 60Hz, 1P	Additional Specs: With Stainless steel sprayball
COOLING TANK	-200 liters capacity, 3 walled 304 stainless steel tank -with service inlet/outlet for hot water/cooling water -Electricals - 0.75kW, 220V, 60Hz,	Additional Specs: With Stainless steel sprayball



	<ul style="list-style-type: none"> with 1P geared motor agitator, slow agitator -Temperature indicator 0-120 °C -With sanitary butterfly valve product -For keeping pasteurized milk and filling at the same time -Made: Stainless steel AISI 304 -Removable cover -Motor control on SS Panel 220V,60Hz,1P 	
HOT WATER TANK	<ul style="list-style-type: none"> -High pressure LPG burner, SS 304 construction rock wool insulation -50mm Insulated 25mm S 40 GI pipes hot water piping work with interconnecting valves -0.5KW ,220V, 60Hz 1P hot water circulating pump -Operating temperature 100 °C -Water level sight glass -Motor control on SS Panel 220V,60Hz,1P 	<p>Additional Specs: Volume Capacity: 500 liters Heating capacity: not less than 100 degrees Celsius</p>
ICE BATH	<ul style="list-style-type: none"> 3 HP, 220V, 60Hz, 1P Condensing Unit -Direct Expansion submerge type copper tube evaporator coil -0.5kW, 220V, 1P chilled water circulating pump -0.5kW, 220V, 1P pump agitator -Stainless Steel construction tank with 50mm insulation, -With outside cladding -Set of insulated GI piping from IBU to PHE/Holding Tank -Motor control on SS Panel 220V,60Hz,1P 	<p>Additional Specs: Volume Capacity: 1,000 liters Cooling capacity: not more than 4 degree Celsius</p>

Spare parts for all the equipment should be locally available.



All interested bidders should submit Audited Financial Statement for CY 2019 and 2020.

The specific location for the processing facilities:

- 4th District of Quezon – Gumaca, Quezon
- Oriental Mindoro – Bansud, Oriental Mindoro

BAFE Certification/accreditation must be submitted during the post qualification. Company profile may be submitted together with the technical eligibility components of the first envelope.

The proposed layout of the processing facility is illustrated below:

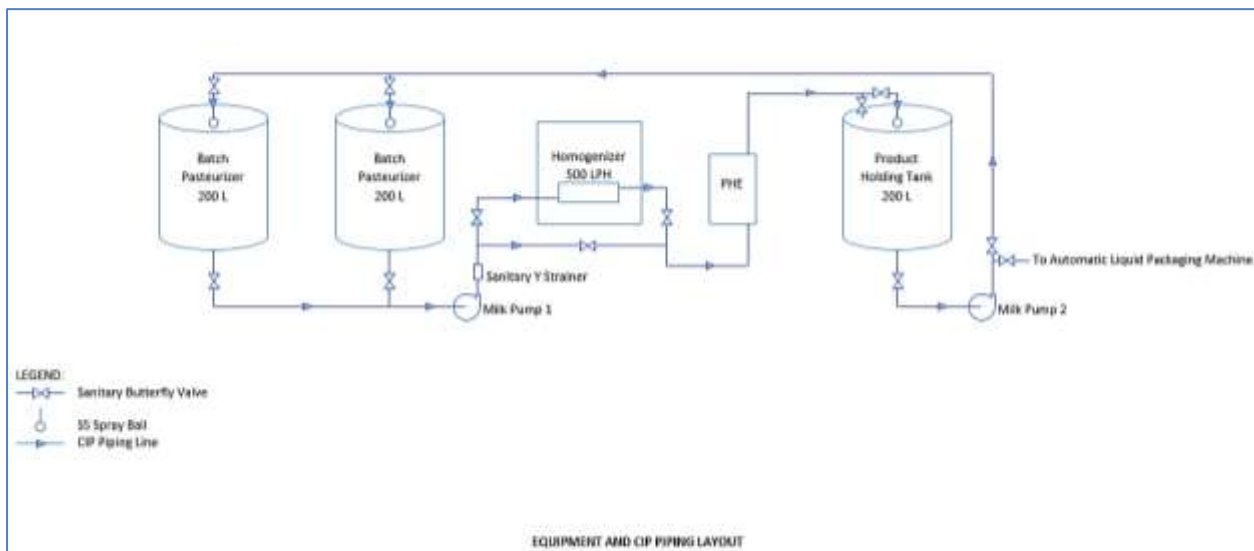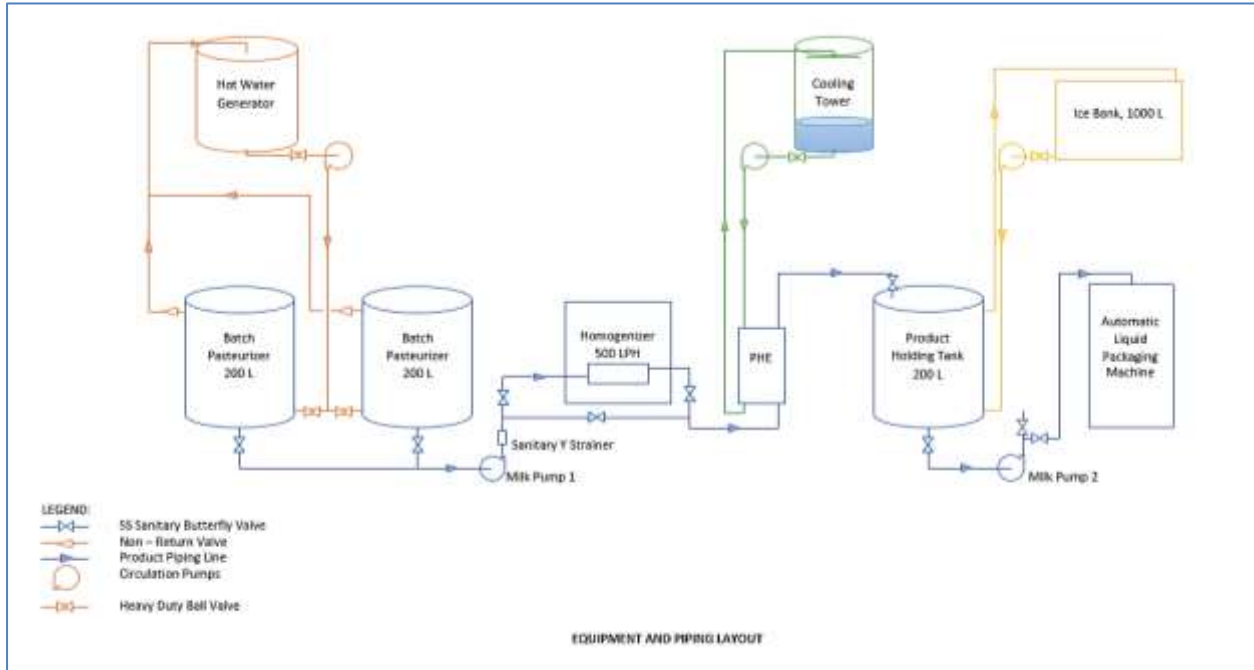

Milk pump not included.

Issued this 2nd day of August, 2021.

Approved:


**FARRELL BENJELIX
 C. MAGTOTO**

Chair


**FEDDIK ANTONETTE
 J. SERRANO**

Vice Chair


**EMMELINE B.
 DELA CRUZ**

Member


PINKY L. BIGUEJA

Member


**JESSIEBOY D.
 DELA ROSA**

Member